



OmniPro[®]

Collision Avoidance System

for Mining & Industrial
Small- to Medium-Sized Mobile Equipment



- OmniPro[®] is a camera safety system that uses Visual Artificial Intelligence (V.A.I.) to detect people and objects, such as stop signs, within a mobile equipment unit's projected travel path and alerts the operator of their presence.
- Operates as an independent warning system. Can also be machine integrated.
- Records and stores zone breach incidents with photo and time-stamp.
- Operates as a single-, dual- or three-camera system for a wider coverage area. Each camera has a 120° field-of-view.

■ Workers do not wear a location device.

- Plug-and-play design for easy installation, set-up and operation.
- Programmable alert zones match your operating environment.
- Rugged design for longer life in high-vibration industrial environments.
- In two-camera systems, OmniPro will auto-switch to only monitor the vehicle's direction of travel (reduces nuisance warnings).

www.matrixteam.com 



OmniPro[®]

Collision Avoidance System

for Mining & Industrial
Small- to Medium-Sized Mobile Equipment

OmniPro[®] Features

- Utilizes audio and/or visual operator alerting
- 3 output relays 5A, switching voltage 277VAC, 30VDC Max
- 2 Optoisolated sourcing inputs 5-30VDC
- 2.4-802.11 dual band Wireless Lan
- 2.4-802.15.24 Zigbee for single or mesh send and receive
- Bluetooth 4.2/BLE
- 3-axis accelerometer
- Ethernet port 10/100/1000 (gigabit)
- HDMI port
- 1 USB 3.0 port
- 10-pin quick connect port for power and IO
- External power LED indication
- Tempered glass lens cover
- Mounting bracket can rotate 180°
- For indoor or outdoor usage

Detection Menu

- Person
- Truck
- Car
- Forklift
- Stop Sign
- Pedestrian Sign

Equipment operator can select the detection and option(s) that best match their operating environment.


OmniPro[®] Specifications

Voltage (input)	9-36VDC
Current (typical)	500mA
Current (peak)	2.5A
Dimensions (H x W x D) - In (H x W x D) - mm	11.0 x 4.75 x 4.25 279.4 x 120.7 x 107.9
Mounting	Mounting bracket provided. Accepts standard RAM mount base hole pattern.
Weight (approx.)	6.00lbs [2.72kg]



INTERSECTION CONTROL

Mounted OmniPro cameras can be used to activate warning signs or other safety devices that alert operators when pedestrians are nearing aisle cross-walks.

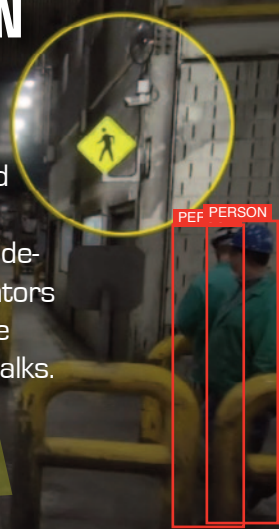

OmniPro-monitored high-volume walkways

The OmniPro IO Module provides power and communications for up to three cameras for maximum field-of-view



FCC ID: MCQ-S2CTH, FCC ID: 2ABCB-RP14B, FCC ID: 2ADUTLGPAAU06
CONTAINS: IC: 1846A-S2CTH, IC: 20953-RP14B
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This Class A/B digital apparatus complies with Canadian ICES-003

OmniPro[®] is a registered trademark of Matrix Design Group, LLC

www.matrixteam.com

Phone: 812.490.1525 • Fax: 812.490.1582 • 3299 Tower Drive • Newburgh, Indiana 47630 • email: sales@matrixteam.com