



OmniPro®

V.A.I.-Based **Collision Avoidance System**
for Forklifts & Mobile Equipment



- OmniPro® is a camera-based collision avoidance system that uses Visual Artificial Intelligence (V.A.I.) to detect people and objects, such as stop signs, within a mobile equipment unit's projected travel path and alerts the operator of their presence.
- Operates as an independent warning system or can be machine integrated.
- Workers do not wear a location device.
- Optimized for minimal nuisance alerts.
- Programmable alert zones match your operating environment.

- Cloud Reporting System provides 24/7 access to software tools, e.g., dashboard, with real-time metrics and analytics.
- Operates as a single-, dual- or three-camera system for a wider coverage area. Each camera has a 120° field-of-view.
- Records and stores zone breach incidents with photo and time-stamp.
- In two-camera systems, OmniPro will auto-switch to only monitor the vehicle's direction of travel [reduces nuisance warnings].
- Plug-and-play design for easy installation, set-up and operation.

www.matrixteam.com 

Phone: +1 812.490.1525 • Fax: +1 812.490.1582 • 3299 Tower Drive • Newburgh, Indiana 47630 • email: sales@matrixteam.com




OmniPro®

V.A.I.-Based **Collision Avoidance System** for Forklifts & Mobile Equipment

OmniPro® Features

- Utilizes audio and/or visual operator alerting
- 3 output relays 5A, switching voltage 277VAC, 30VDC Max
- 2 Optoisolated sourcing inputs 5-30VDC
- 2.4-802.11 dual band Wireless Lan
- 2.4-802.15.24 Zigbee for single or mesh send and receive
- Bluetooth 4.2/BLE
- 3-axis accelerometer
- Ethernet port 10/100/1000 (gigabit)
- HDMI port
- 1 USB 3.0 port
- 10-pin quick connect port for power and IO
- External power LED indication
- Tempered glass lens cover
- Mounting bracket can rotate 180°
- For indoor or outdoor usage

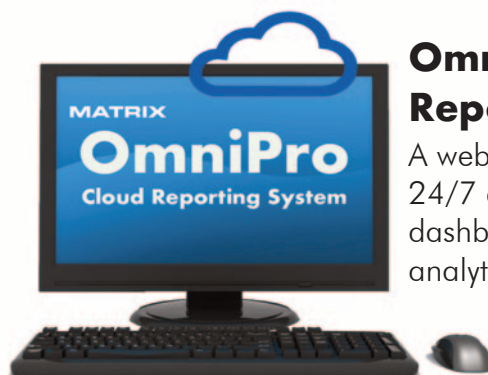

OmniPro® Cloud Reporting System

A web-based application that provides 24/7 access to software tools, e.g., dashboard, with real-time metrics and analytics

Breach notification and reporting

- Full-data capture with data analysis
- Average daily breaches per machine; trending breaches over time
- Access to event graph with images time-stamped for Alert and Warning Zone breaches
- Can filter by Zone type
- Can sort by type of event: person, fork truck, car, etc. SMS or text messaging alerting available if an event occurs

Benefits

- Tracks safety and performance
- Can identify accident risk areas
- Identifies the most dangerous hours and days
- Provides near-miss reporting with location identified and images time-stamped

INTERSECTION CONTROL

Mounted OmniPro cameras can be used to activate warning signs or other safety devices that alert operators when pedestrians are nearing aisle cross-walks.

OmniPro-monitored high-volume walkways



OmniPro® Specifications

Dimensions (H x W x D) - In (H x W x D) - mm	11.0 x 4.75 x 4.25 279.4 x 120.7 x 107.9
Mounting	Mounting bracket provided. Accepts standard RAM mount base hole pattern.
Weight (approx.)	6.00lbs [2.72kg]

FCC ID: MCQ-S2CTH, FCC ID: 2ABCB-RP14B, FCC ID: 2ADUTLGP006
CONTAINS: IC: 1846A-S2CTH, IC: 20953-RP14B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This Class A/B digital apparatus complies with Canadian ICES-003

OmniPro® is a registered trademark of Matrix Design Group, LLC

www.matrixteam.com

Phone: 812.490.1525 • Fax: 812.490.1582 • 3299 Tower Drive • Newburgh, Indiana 47630 • email: sales@matrixteam.com